

Digital Signage Display KIOSK

Full Touch Screen



Key Feature of Digital Standee



- » High-Resolution Visuals
- » User-Friendly Interface
- » Customizable Content
- » 10 Points Capacitive Touch Screen

1 Content Management


1 Remote Management

1 Integration




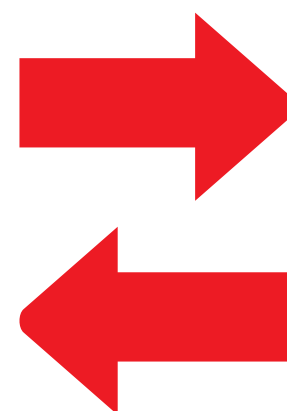

Auto-Loop
Playback



Plug & Play



HDMI Input



WIFI
Connectivity

Specifications:



Display

Memory

Processor

Battery & Power

Networking & Connectivity

Audio & Microphone

Physical Specification

Technical Info

Others

Details	50" Digital Standee
Screen Size	50 Inch
Resolution	3840 x2160
Aspect Ratio	16:09
Panel	A+ Grade
Graphics	ARM G52 2EE
Display	IPS
Display Touch	10 Points Capacitive Touch Screen
Viewing Angle	89/89/89/89
Contrast	1100:01:00
Display Area	1073.8 x 604
Response Time	≤ 6ms
Memory Size	4GB
Memory Type	DDR4
ROM	32GB
Processor Speed	1.8GHz
Power Supply	Input: AC 100~240V 50/60Hz
Power Consumption	Running Mode: 70-120W & Standby Mode: 5W
Bluetooth	V4
Networking	Ethernet RJ-45 & Wi-Fi 802.11b/g/n
USB USB	USB 2.0 Ports: 2
Audio Output	Built in 8Ω/10W x 2 Speakers
Audio	MP3, MP2, WMA, WAV
Temperature	Operating Temperature: 0°C~ 50°C Storage Temperature: -10-60°C
Materials	Black Metal Structure
LED Type	Backlight LED: WLED
OS	Android 11
Picture Formats	JPEG, PNGProcessor
	Light Transmittance: >97%
	Tempered Glass Hardness: 6-6.5 Mohs
	Luminance: 400cd/m²
	Tempered Glass Thickness: 4mm
	Pixel Pitch MM (H x V): 0.315×0.315
	2 Year Warranty